



# OPTIMAL COST PERFORMANCE

## High Cost Performance

Simple Design  
Less Components

## Energy Saving

Low Electrical Consumption

## Low Noise Level

Low Noise Level in Operation

## Simple Operation

Just set the pattern & press  
"Start"!




# A400 Robot Palletizer




## Robot Palletizer Controller



## Robot Palletizer Size & Operation Range

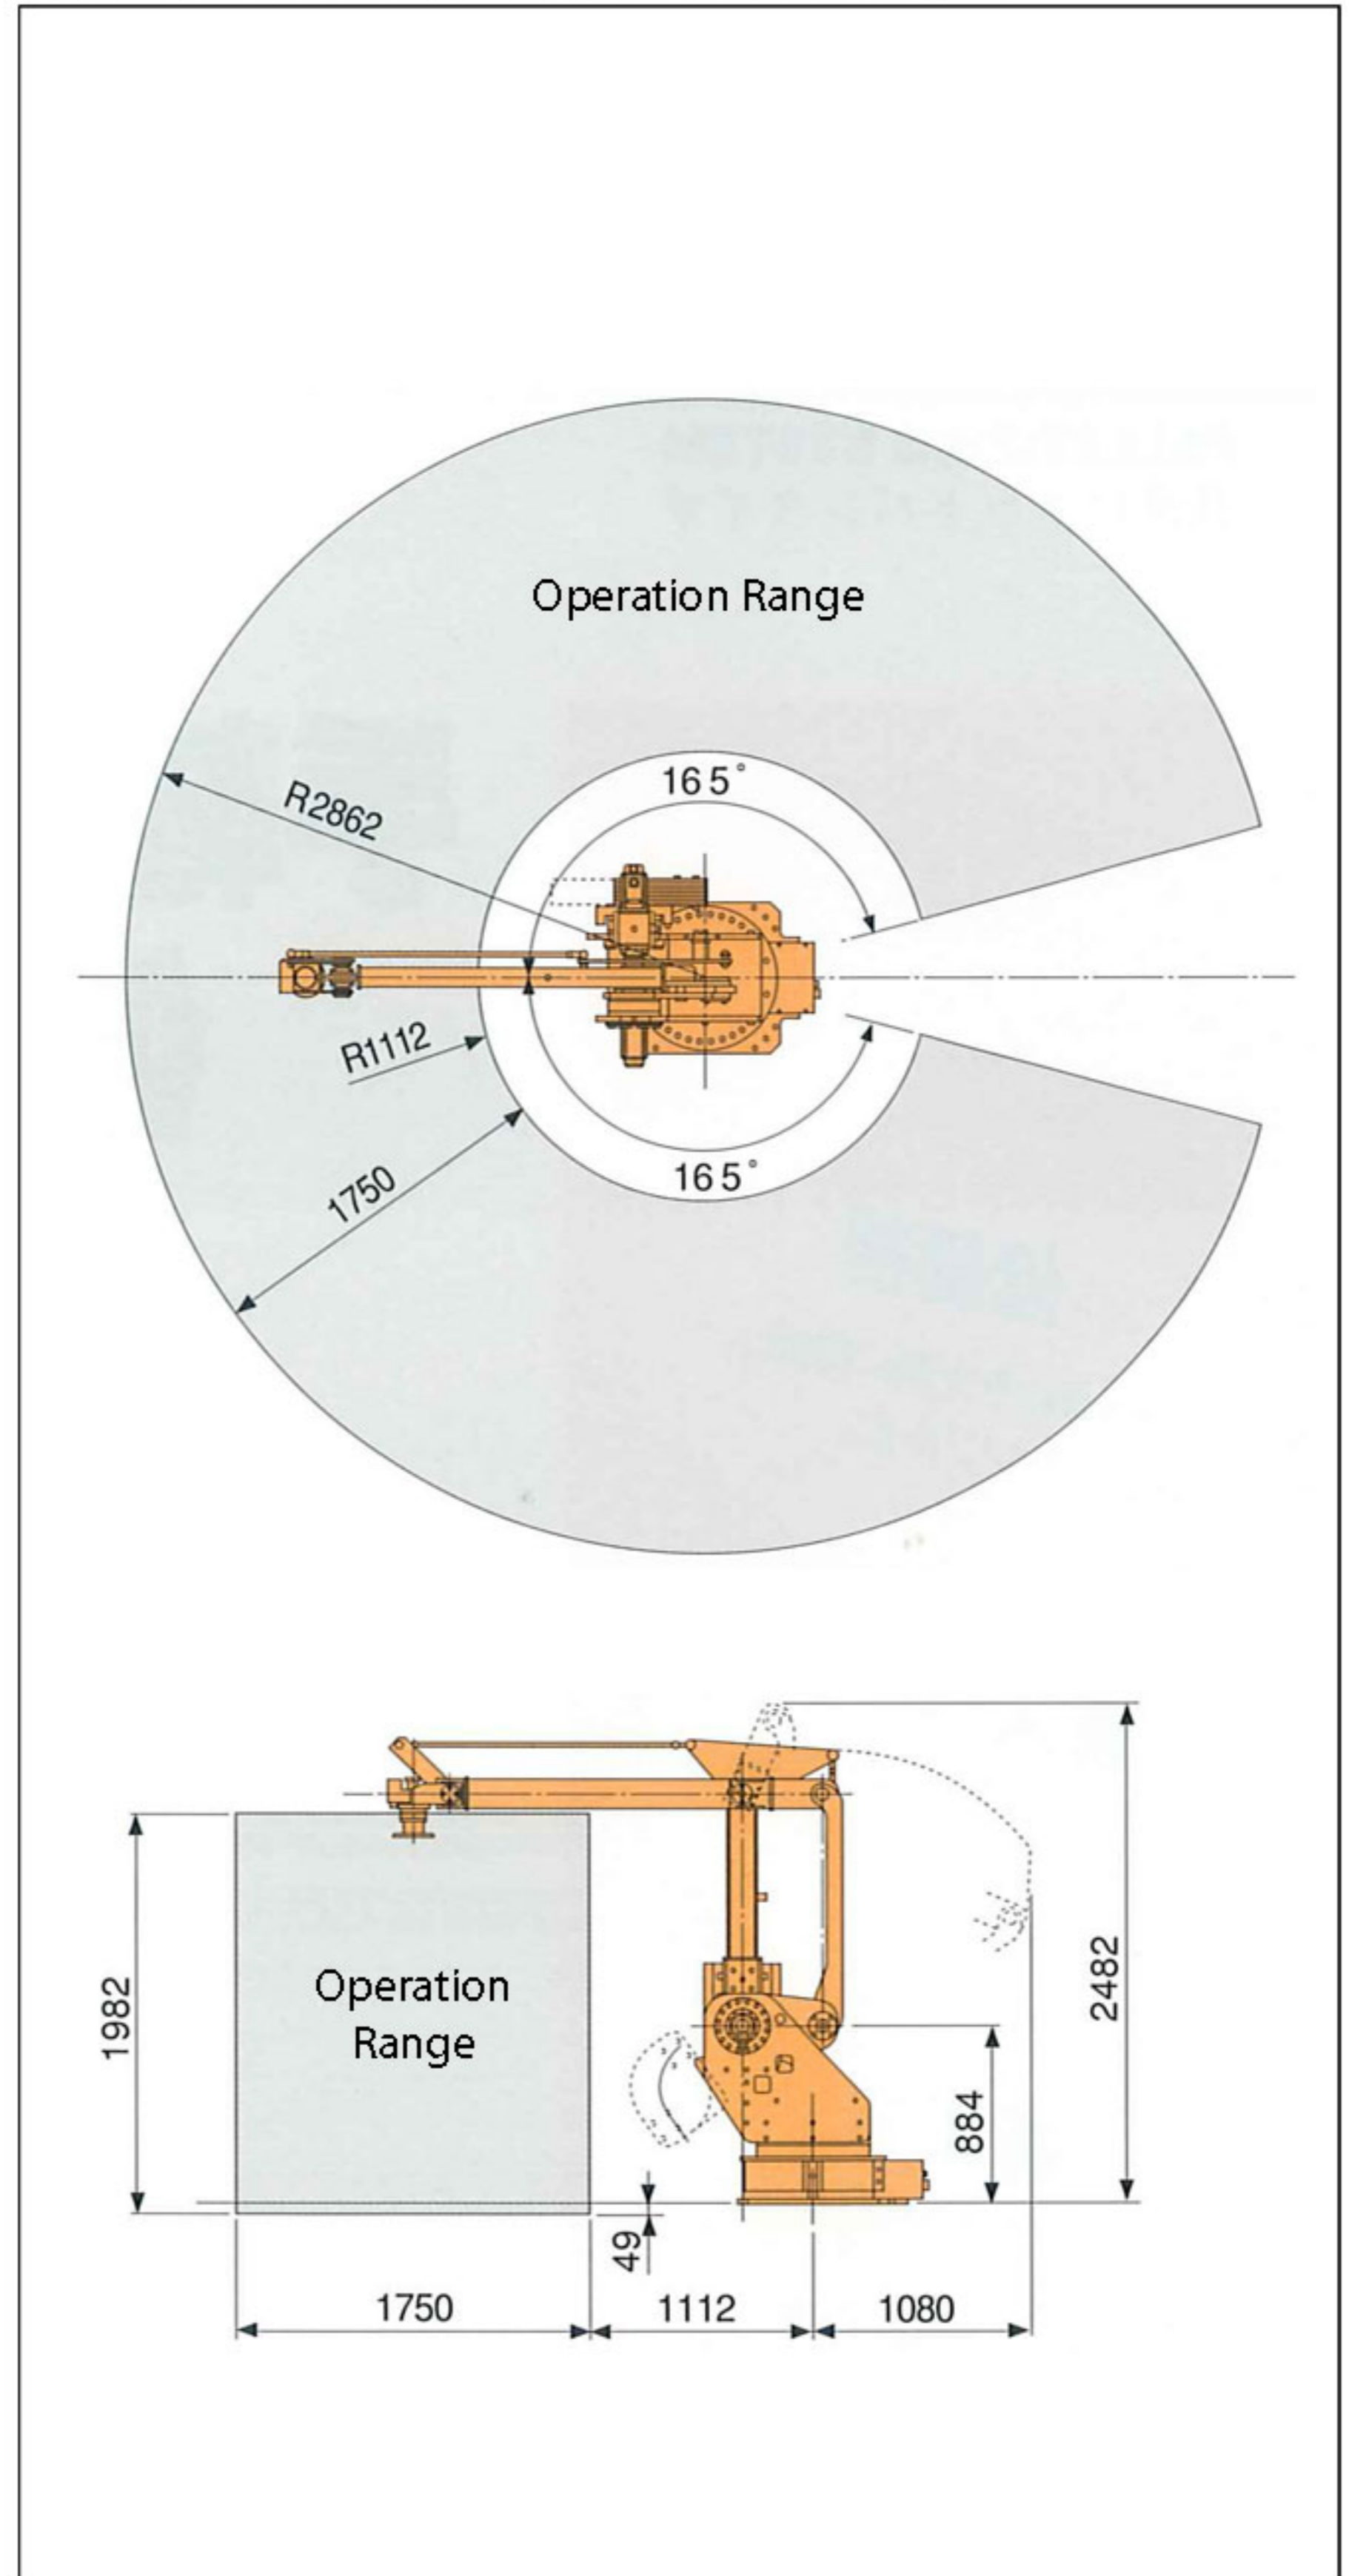

## Application Examples

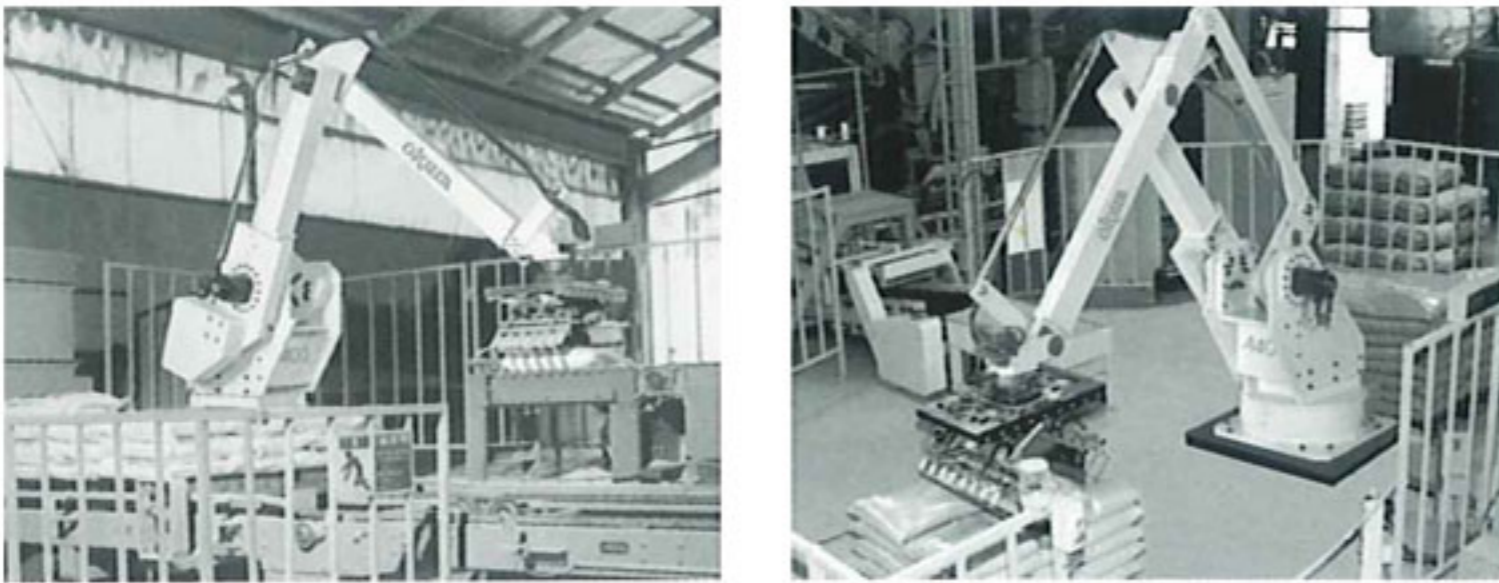

## Specifications

Load Capacity	140 Kg (Includes weight of end effector)		
Operation Range	4 axes (R, O, D, T axes)		
	R axes	330°	D axes 1982 mm
	O axes	1750 mm	T axes 440°
Palletizing Rate	400 cycles/hour Max.		
Accuracy	Repeated stop position accuracy $\pm 5$ mm		
Robot Weight	1160 Kg		
Pneumatic Consumption	180 l/min (ANR)		

### Japan

Okura Yusoki Co. Ltd  
 900 Furuouchi Noguchi-cho Kakogawa Hyogo Japan 675-8675  
 Tel: +81 794 26 1009 Fax: +81 794 26 1184  
 Email: admin@okurayusoki.co.jp Website: www.okurayusoki.co.jp

### Singapore

Okura Flexible Automation Systems Pte Ltd (OFAS)  
 211 Henderson Road #08-04 Henderson Industrial Park Singapore 159552  
 Tel: +65 6276 1711 Fax: +65 6276 7211  
 Email: sales@okura-sing.com.sg Website: www.okura.com.sg

### Malaysia

Okura Flexible Automation Systems (M) Sdn Bhd (OFAS)  
 3A-D, Jalan USJ 10/1A, Pusat Perniagaan USJ 10,  
 47610 UEP Subang Jaya, Selangor Darul Ehsan, Malaysia  
 Tel: +60 3 8023 6381 Fax: +60 3 8023 6390  
 Email: okura@tm.net.my

### China

Okura Flexible Automation Systems (Shanghai) Co., Ltd (OFAS)  
 Room 1804, Yundu Hongqiao Tower, No. 930, Zhongshan (West) Rd,  
 Shanghai, P.R. China, P.C. 200551  
 Tel: +86 21 6275 9825 Fax: +86 21 6275 9826  
 Email: admn@okura-sha.com.cn

